




**TRANSITION AT BRIDGE COLUMNS**  
CONCRETE BARRIER TYPE 60G

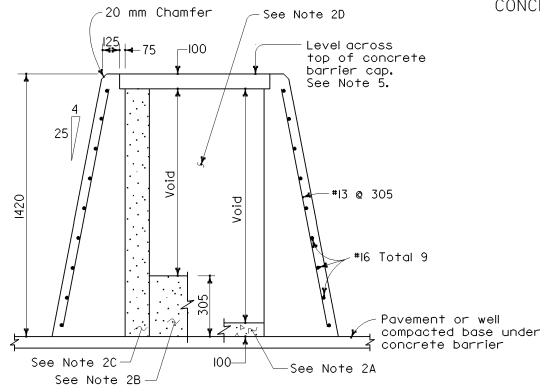


SECTION A-A



SECTION B-B

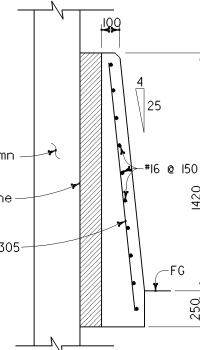

SECTION C-C

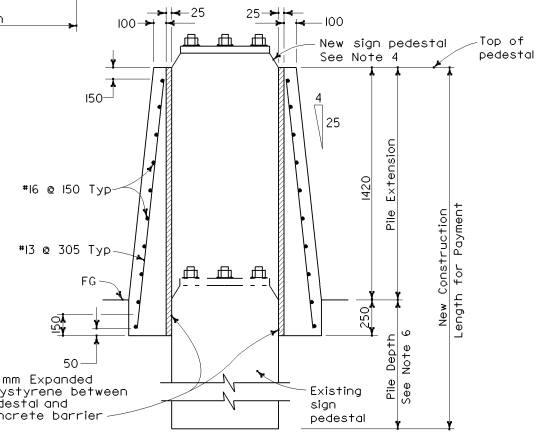

SECTION D-D

### NOTES

- See Standard Plan A76D for Concrete Barrier Type 60G.
- Contractor options for fill between concrete barrier walls:
  - Place 100 mm PCC at base between concrete barrier walls.
  - Place 305 mm of granular material at base between walls.
  - Place granular material from base to bottom of 100 mm cap.
  - Monolithic concrete with foam blockouts is not permitted.
- Reinforcing steel shall extend continuous through construction joints.
- See "Overhead Sign" plans for sign pedestal elevations on new construction.
- Adjust height of concrete barrier wall on low side of offset or super-elevated roadways to provide level grade across top of concrete barrier cap.
- See Overhead Signs Standard Plan Pile Foundation Tables.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

## CONCRETE BARRIER TYPE 60G

NO SCALE

ALL DIMENSIONS ARE IN  
MILLIMETERS UNLESS OTHERWISE SHOWN

**A76F**

DIST	COUNTY	ROUTE	KILOMETER POST TOTAL PROJECT	SHEET TOTAL NO. SHEETS

**Caltrans**  
**Metric**

*Elis K. Hirst*  
REGISTERED CIVIL ENGINEER  
No. C17926  
Exp. 6-30-05  
STATE OF CALIFORNIA

July 1, 2004  
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To get to the Caltrans web site, go to: <http://www.dot.ca.gov>